

(**GFEFUSE® ANL-A®**) Fork bolt (bolt) automobile fuse (DC fuse)

1. Dimensions (mm)



2. Specifications

Housing: Out of thermoplastic (UL 94-V0, heat-resistant) Visible melting element

Terminal: Copper alloy, gal. Sn 2 x M8 bolts, Distance 60 mm


Mounting Torque: 12.0 Nm +/- 1Nm

Breaking Capacity: 12V24V32V48V58V DC

Implementation criteria: DIN 43560/1



3. Time-Current Characteristics

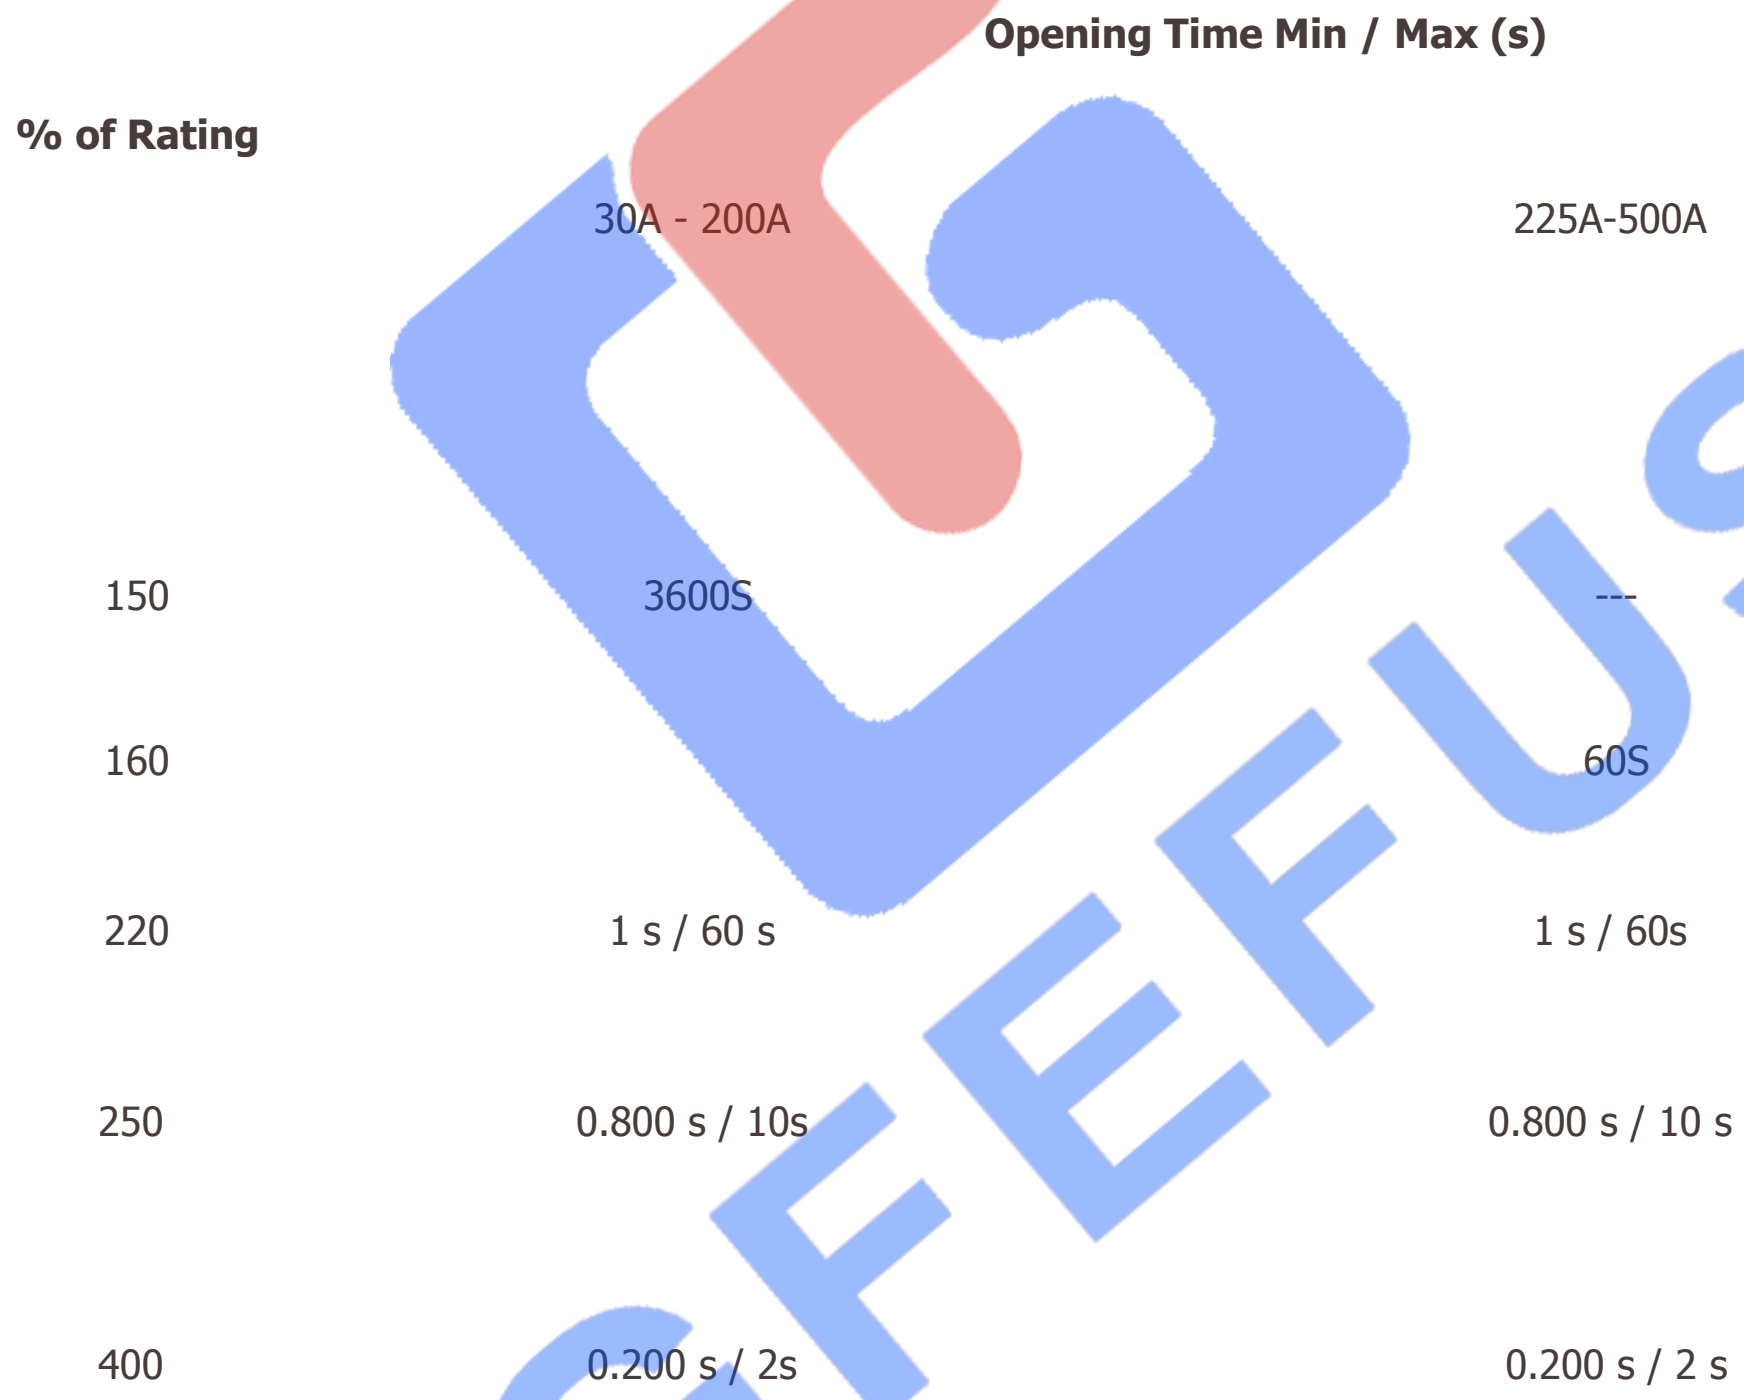




4.Ratings

TYPE	Rating Current(A)	Typ Voltage drop
ANL-A030	30A	≤150Mv
ANL-A040	40A	≤150Mv
ANL-A050	50A	≤150Mv
ANL-A060	60A	≤130mV
ANL-A080	80A	≤130mV
ANL-A100	100A	≤110mV
ANL-A125	125A	≤110mV
ANL-A150	150A	≤100mV
ANL-A175	175A	≤100mV
ANL-A200	200A	≤100mV
ANL-A250	250A	≤90mV
ANL-A300	300A	≤90mV
ANL-A350	350A	≤90mV
ANL-A400	400A	≤90mV
ANL-A500	500A	≤90mV
ANL-A600	600A	≤90mV

Operating Time Characteristics

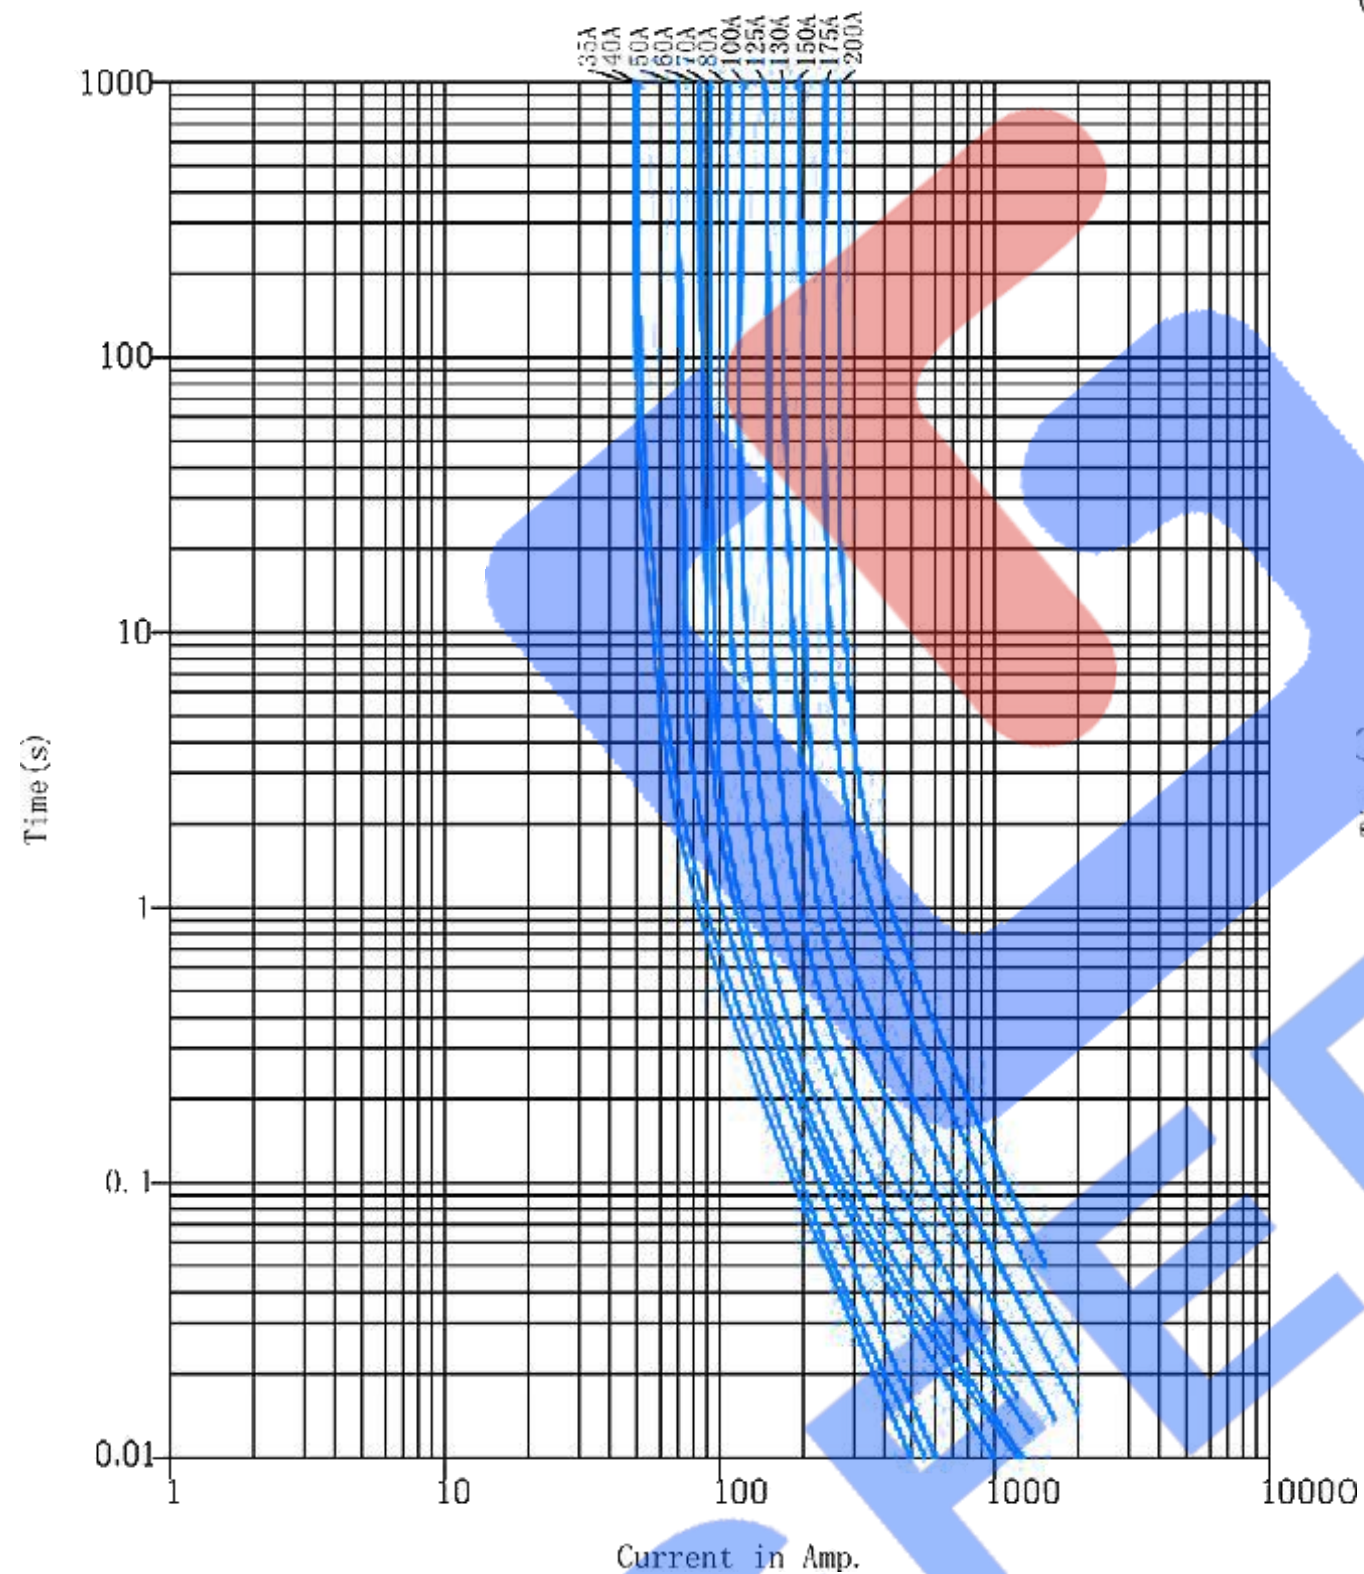

Operating Time Characteristics

