



（GF-702A insert car fuse holder (horizontal mini car insert fuse holder)


1. Product size installation diagram

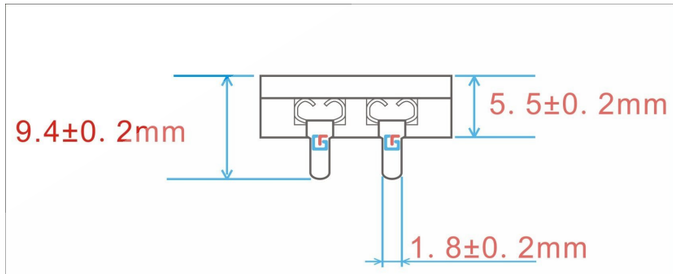

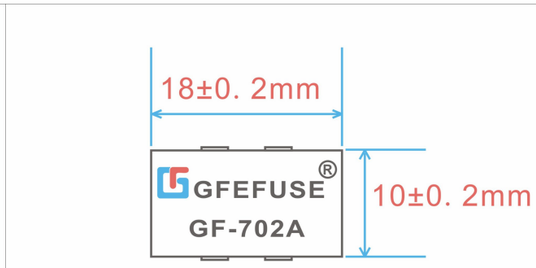

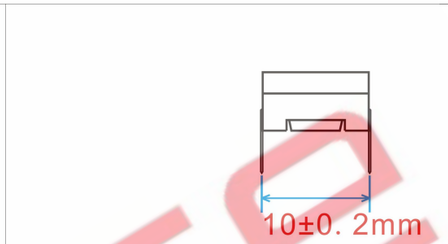

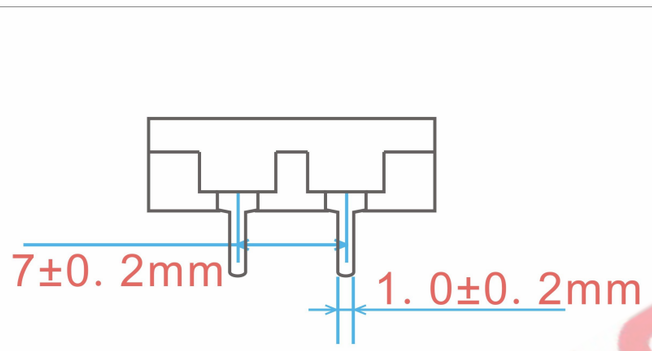

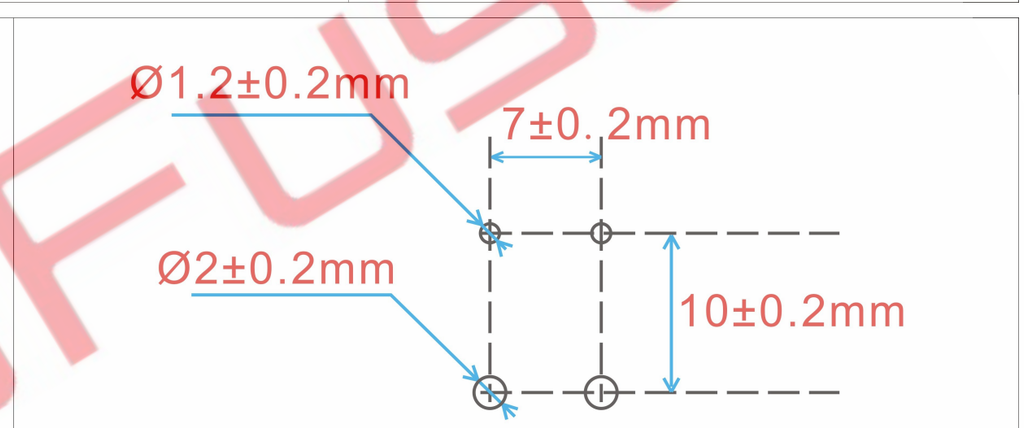

2. Product introduction

1.material: Contacts--brass, T=0.3mm; Base: PBT UL-94V0
2.terminal finish: Tin plated;
3.Matching mini-car insert fuses (GFEFUSE® GF-C series insert mini-fuses)
4.Suitable rated current: 30A@500VAC.
5.Insertion and extraction force: 1Kg Min.
6.Dielectric Strength: Min.AC1000V.
7.Contact Resistance: Max 50mΩ
8.temperature rise: 130° Max.
9.Insluation Resistence At 500V DC: 100mΩ
10.Welding temperature: 260 ℃ 3 seconds

Attention: Product size changes are not notified