


(GF-702A insert car fuse holder (horizontal mini car insert fuse holder))

1. Product size installation diagram

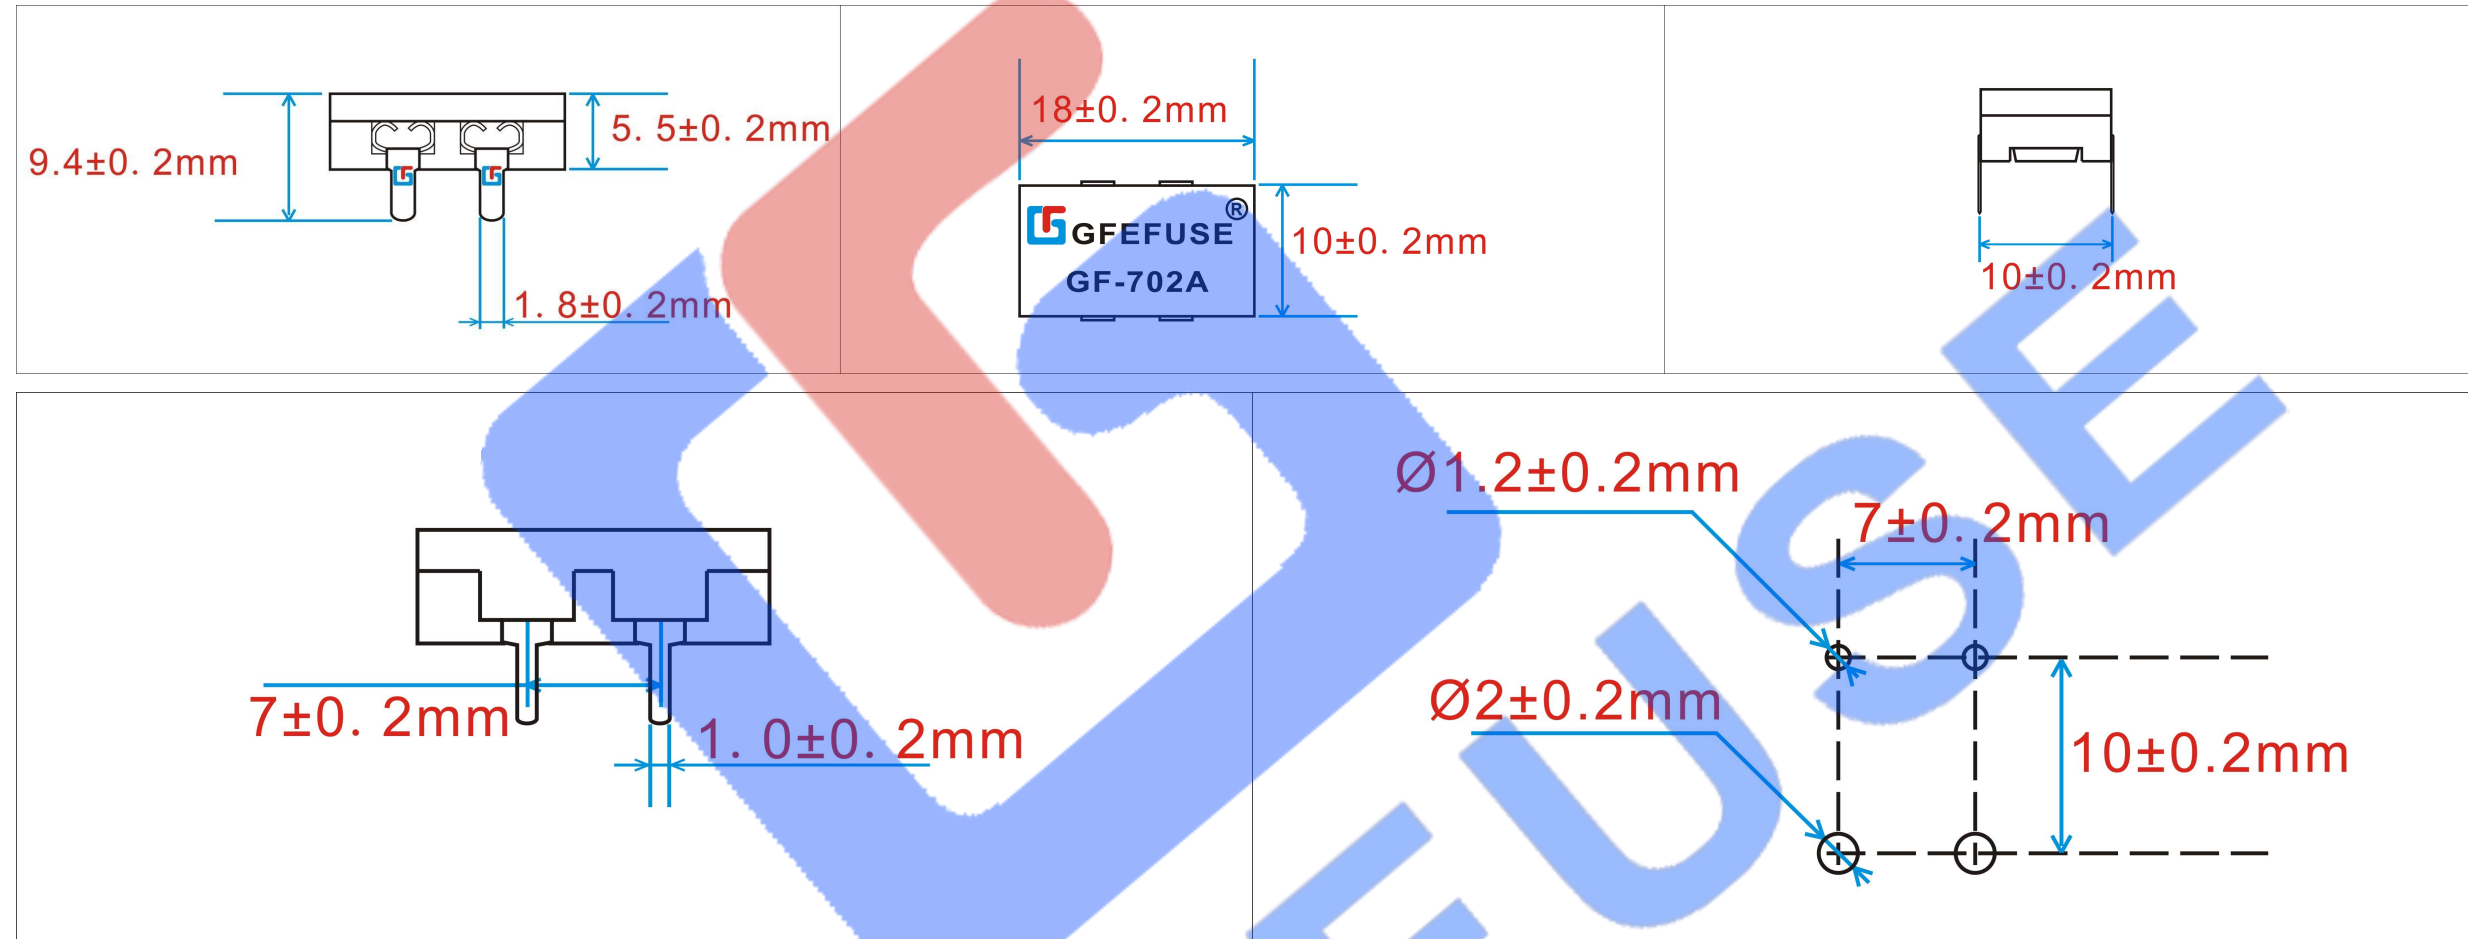

2. Product introduction

- 1.material: Contacts--brass, T=0.3mm; Base: PBT UL-94V0
- 2.terminal finish: Tin plated;
- 3.Matching mini-car insert fuses (GFEFUSE® GF-C series insert mini-fuses)
- 4.Suitable rated current: 30A@500VAC.
- 5.Insertion and extraction force: 1Kg Min.
- 6.Dielectric Strength: Min.AC1000V.
- 7.Contact Resistance: Max 50mΩ
- 8.temperature rise: 130° Max.
- 9.Insulation Resistance At 500V DC: 100mΩ
- 10.Welding temperature: 260 °C 3 seconds

Attention: Product size changes are not notified