


(GF-C40)automobile fuse Holder

1. Dimensions (mm)

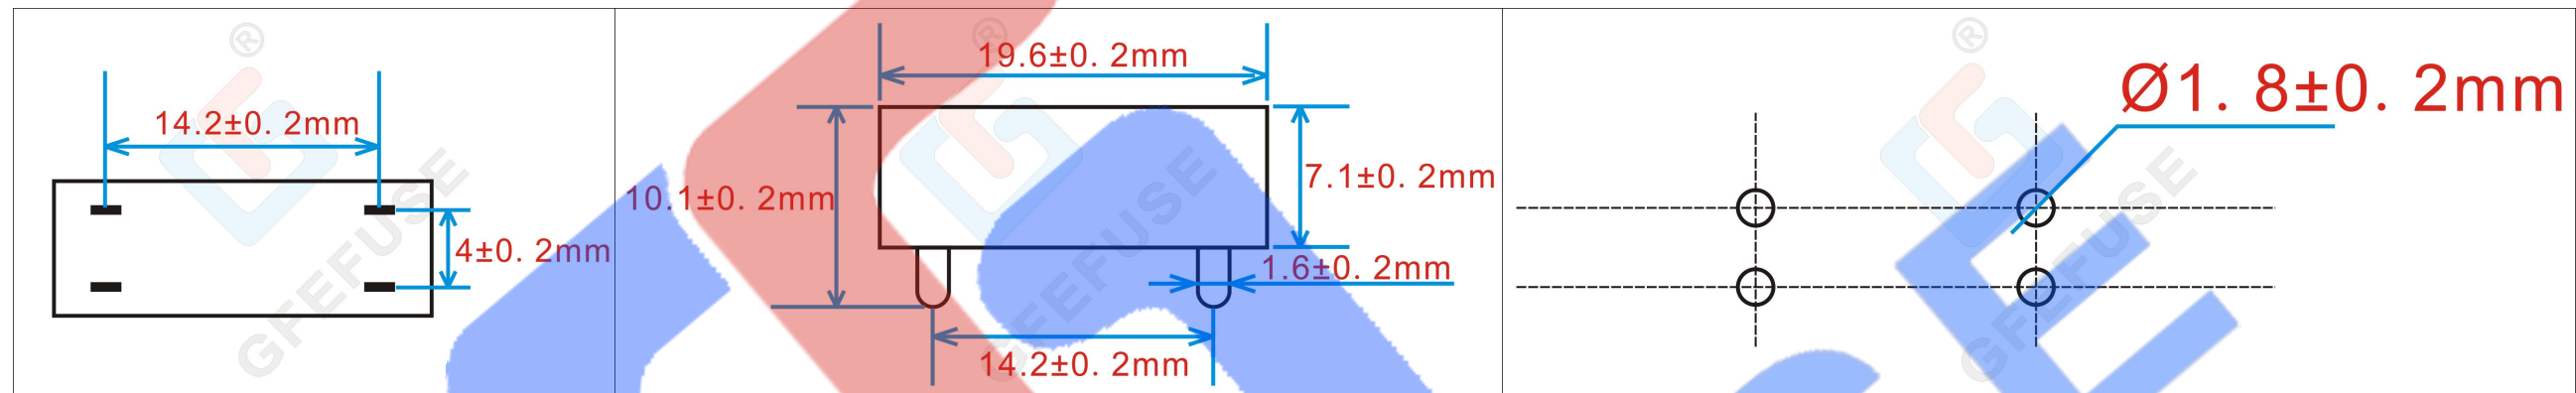

2. product introduction

1. Insulator--Glass Filled PBT, UL94-V0;

2. terminal finish: Tin plated;

3. removed burrs and sharp edge.

4. (medium) (small) (MINI) (extra small)

5. three in one universal fuse plug holder

6. Suitable rated current: 30A@500VAC

7. Insertion and extraction force: 1Kg Min

8. Dielectric Strength: Min.AC1000V

9. Contact Resistance: Max 50mΩ.

10. Contact Resistance: Max 50mΩ

11. Insulation Resistance At 500V DC: 100MΩ

12. product model GF-C40 (Brand GFEFUSE GongFu)