
ROHS



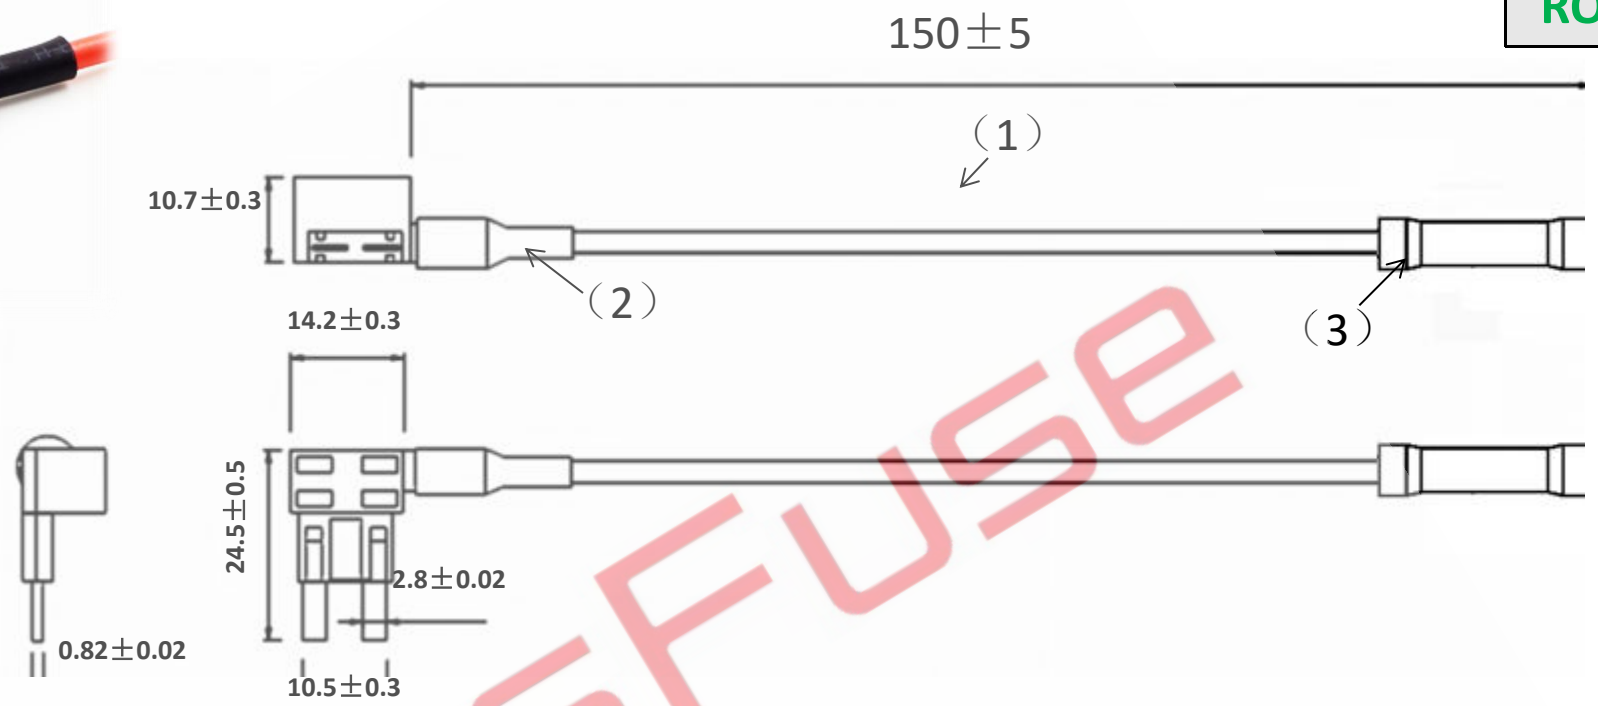


Suitable for small car insert fuses
Rated current: 15AMP
Flame Retardant Grade: 94V-0
Internal terminals ACN-1, ACN-2, ACN-3 (plug-in force after 6 taps is greater than 6N)
1. Wire: 1015-16AWG
2. Heat shrinkable casing: 6 125 degree 600V
3. Terminals: blue middle terminal
4. Product model: GF-70BF(GFEFUSE)
Remarks:
No seamless burr in hot-bonding is clean, the terminal is pressed firmly without breaking line, no short circuit, breaking circuit, dislocation, good conduction, and no damage to the line skin.

ESFUSE

| Corporate name | Dongguan Gongfu Electronics Co., Ltd. | Modify content | | Approval | To examine | Drafting |
|---|---|---|---|---|---|---|
| Product name | Electrical appliances | 1015-16AWG L=150±8MM | | bing | bing | bing |
| Model | GF-70BF | Drawing time | 2016.05.12 | Company | mm | |