
A:Product Dimension Installation Drawings

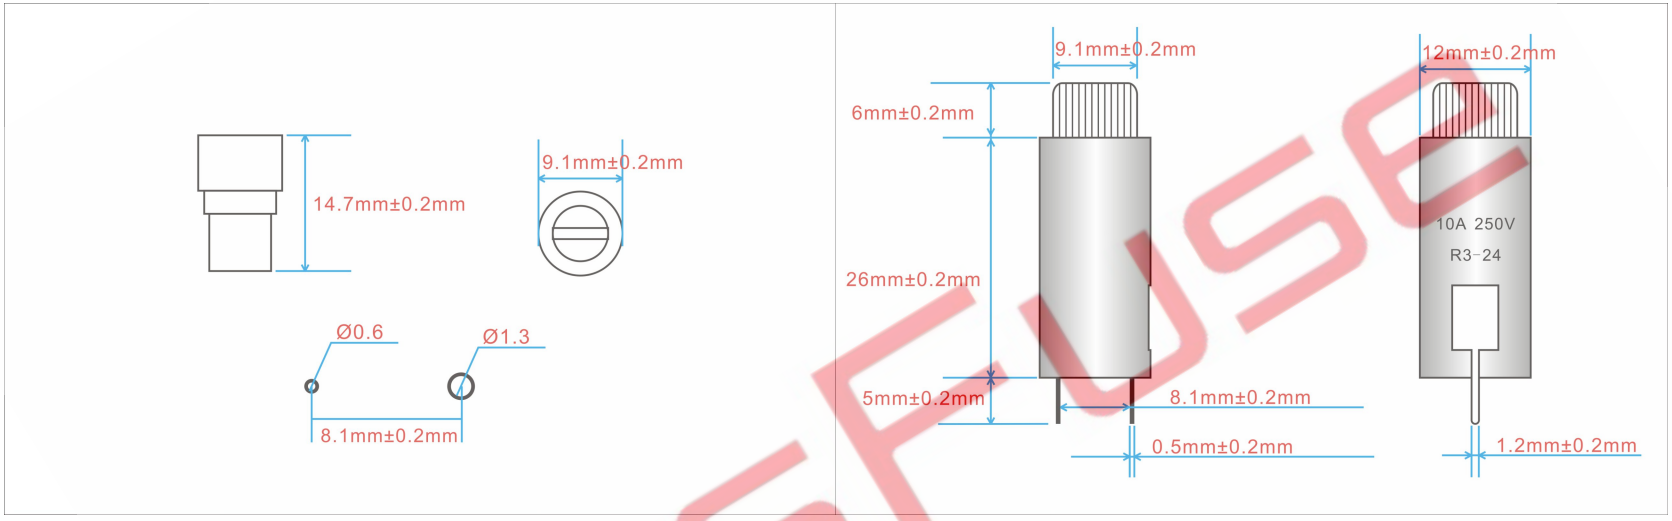

B:Product introduction

1.Product model: R3-24
2.rated current: 10A
3.rated voltage: 250V/125V (AC/DC)
4.Fitting 5 x 20mm fuse pipe
5.split current: 50A
6.Base: Black Bakelite(UL-94V0)
7.terminal: 0.5mm (phosphor)
8.withstand voltage: 3000VAC
9.contact resistance：<5mΩ
10.insulation resistance：>100MΩ

Note: Product changes are not notified

EssFuse